



FW0070

SPECIFICATIONS

(Also early FW0E70 - before June 2003)



Heavy Duty Fifth Wheel

34000 kg Vertical Load

165 kN D-Value - 2" Version

240 kN D-Value - 3.5" Version

Earlier Version - before June 2003

FEATURES OF THE FW0E70

- Heavy Duty Fifth Wheel for general on- and off-road applications where higher capacities are required.
- Available with Locks for 3.5" and 2" Kingpins.
- High strength cast steel construction, minimum operating temperature -40°C.
- Forged, heat treated steel locks, for maximum strength and durability.
- Manufactured in accordance with DIN 74081 and DIN 74084 standards.





WARNING

Mounting must be carried out in accordance with Holland instructions



WARNING

The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland

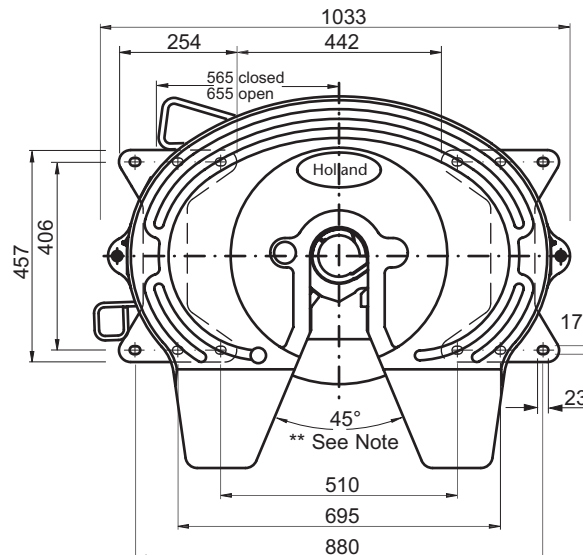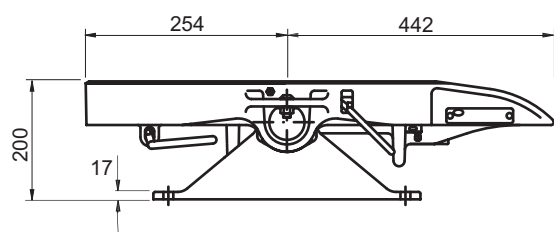




** Note : Throat angle 40° on early FW0E70

Part Number *	Height	Vertical Load	D-Value	Weight	Locks
FW0070-03 *	top plate only	34000 kg	240 kN	148 kg	3.5"
FW0070-02 *	top plate only	34000 kg	165 kN	148 kg	2"
FW0070-06119 *	200 mm	34000 kg	240 kN	184 kg	3.5"
FW0070-06119-2 *	200 mm	34000 kg	165 kN	184 kg	2"

* Note : Complete units no longer available - see new type FW0E70, document no. XL-FW1090-01

Holland reserves the right, without prior notice, to change specifications and dimensions.

FW0070 / early FW0E70 FIFTH WHEEL - SPARE PARTS

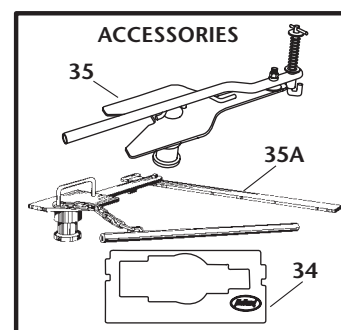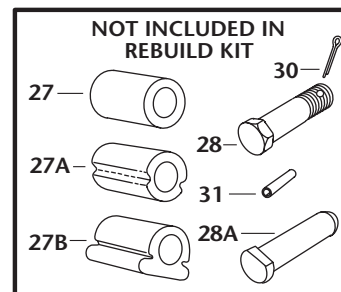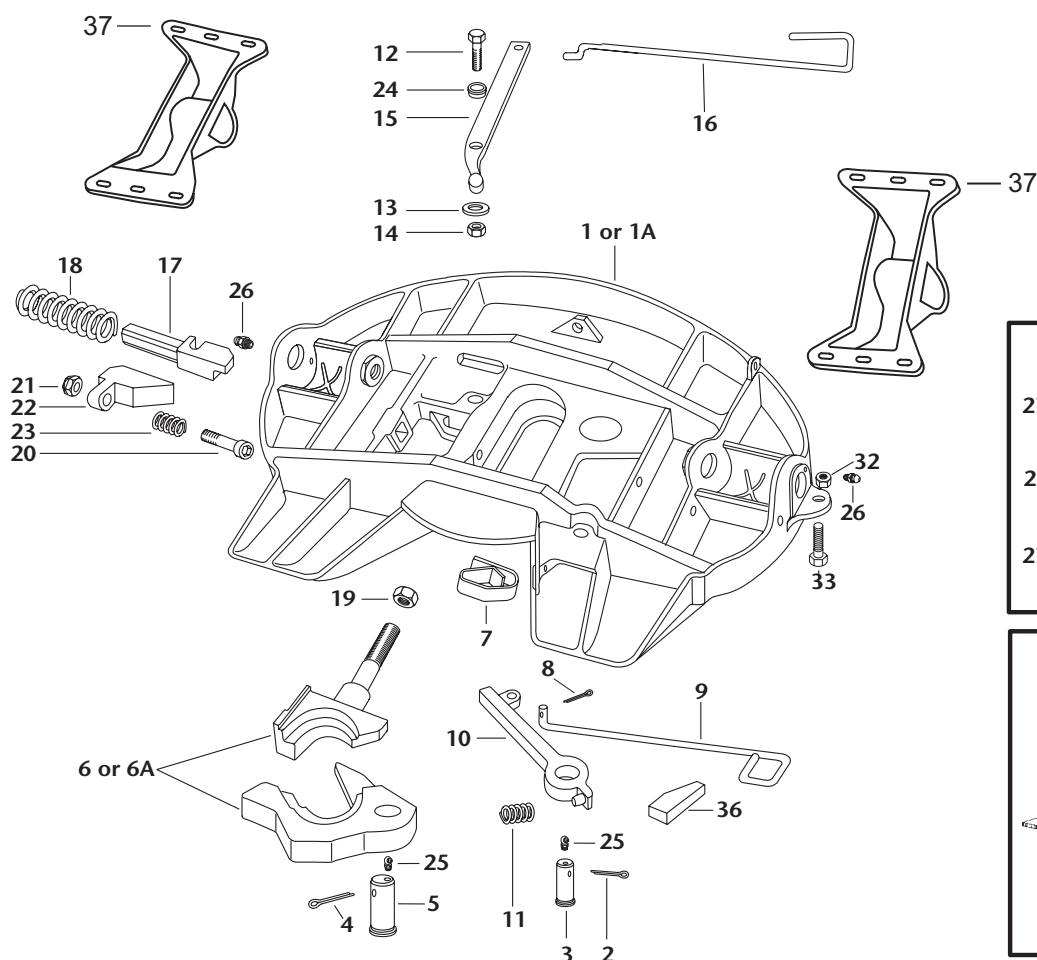

ITEM	PART NO.	QTY	DESCRIPTION	ITEM	PART NO.	QTY	DESCRIPTION
*1	FW0E70-02-TP	1	Complete assy - 2" (NEW TYPE)	20	XB-09407	1	Socket head cap screw
*1A	FW0E70-03-TP	1	Complete assy - 3.5" (NEW TYPE)	21	XB-09174	1	Lock nut 5/8" - 11
2	XB-5	1	Cotter pin 1/4" x 2"	22	XD-3123-1-KTL	1	Adjusting wedge
3	XA-1016-C-KTL	1	Lock pin	23	XB-403-KTL	1	Compression spring
4	XB-T-60	1	Cotter pin 1/4" x2.5"	24	XB-02949	1	Bushing
5	XA-FW-108-D	1	Lock pin	25	XB-0769	2	Lube fitting (90°)
6	XA-FW-104-D-KTL	1	Lock set for 2" kingpin	26	XB-H-38	2	Lube fitting
6A	XA-FW-104-03-KTL	1	Lock set for 3.5" kingpin	* 27	XB-1604-9	2	Bushing (prior to 5/82)
7	XA-FW-128	1	Spring	* 27A	XB-0012-1	2	Bushing (5/82 - 9/87)
8	XB-16	1	Cotter pin 1/8" x 1"	* 27B	XB-0012-3	2	Bushing (after 9/87)
9	XA-FW-78	1	Secondary lock release handle	* 28	XA-2632	2	Pivot bolt (prior to 11/86)
10	XA-FW-137-2-KTL	1	Secondary lock arm	* 28A	XE-02759-KTL	2	Pivot pin (after 11/86)
11	XB-1028-2	1	Spring	* 29	XB-T-9N-2	2	Nut (prior to 11/86)
12	XB-2083	1	Hex hd. bolt 1/2" - 20 x 1.75"	* 30	XB-T-60	2	Cotter pin (prior to 11/86)
13	XB-T-49	1	Plain washer	* 31	XB-21-S-375-1750	2	Roll pin
14	XB-T-69-A	1	Hex lock nut	* 32	32001	2	Hex lock nut
15	XA-1005-FH-KTL	1	Release lever	* 33	31041	2	Bolt
16	XA-1117-H-KTL	1	Release handle	* 34	TF-0110	1	Kingpin gage
17	XA-1104-KTL	1	Plunger	* 35	TF-TLN-5001	1	2" kingpin lock tester
18	XB-1007	1	Compression spring (red)	* 35A	TF-TLN-1500	1	3.5" kingpin lock tester
19	XB-04473	1	Jam nut 1" - 14	36	XA-05768-1	1	Adjusting block
				* 37	XD-05518-KTL	2	Brackets for 200 mm Height
	RK-65024		Lock repair kit (2")		RK-65014		Full overhaul kit (2")
	RK-65024-1		Lock repair kit (3.5")		RK-65015		Full overhaul kit (3.5")

* Not included in Rebuild Kits

Copyright © June 2004 • The Holland Group Inc.



The Holland Group, Inc.
Holland, MI 49423
United States
Phone: (616) 396-6501
Fax: (616) 396-1511

EN ISO
9001:2000



DNV
Certified
Company

Holland Europe GmbH

Altenkamp 9
D-33758
Schloss Holte-Stukenbrock
Germany
Phone: +49 (0) 5207-89560
Fax: +49 (0) 5207-895656

Holland Eurohitch Ltd.

Hoo Farm Industrial Estate
Worcester Road
Kidderminster
Worcestershire
DY11 7RA
Phone: +44 (0) 1562-732010
Fax: +44 (0) 1562-732020

Holland Hitch (Aust.) Pty. Ltd.

Melton, Victoria, Australia
Phone: 61-(0)3-9743-6799
Fax: 61-(0)3-9747-9617

Holland Transtrade

(Thailand) Company, Ltd.
Bangkok, Thailand
Phone: 66 (0)2-513-8758
Fax: 66 (0)2-513-8757

Nippon Holland, Ltd.

Tokyo, Japan
Phone: 81-(0)3-3461-9130
Fax: 81-(0)3-3463-1407

Holland Transtrade

Far East SDN BHD
Shah Alam, Malaysia
Phone: 60 (0)3 734-2888
Fax: 60 (0)3 736-5588