



FW0100

FW0100 SPECIFICATIONS



Extra Heavy Duty Fifth Wheel

45000 kg Vertical Load

165 kN D-Value - 2" Version

240 kN D-Value - 3.5" Version



WARNING

The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland



FEATURES OF THE FW0100

- 2" or 3.5" Extra-Heavy Duty Fifth Wheel manufactured from high strength cast steel, designed for the most demanding applications.
- The high strength lock system is manufactured from high quality forged and heat-treated components.
- Solid trunnion shaft serves as a torsion bar between the brackets for extremely high vertical loads.
- Minimum operating temperature -40°C.
- Suitable for rear axle steering systems, high steering accuracy due to minimal radial movement.



WARNING


Mounting must be carried out in accordance with Holland instructions

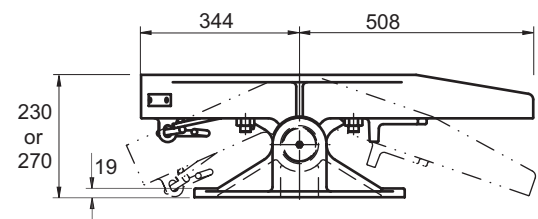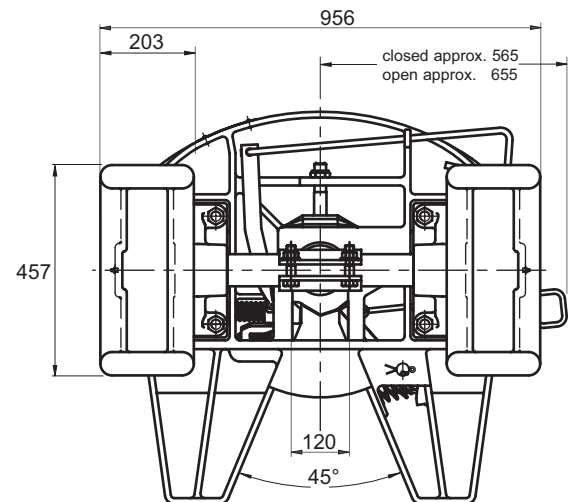

Part Number	Height	Vertical Load	D-Value	Weight	Locks
FW0100-3.5	top plate only	45000 kg	240 kN	159 kg	3.5"
FW0100-2	top plate only	45000 kg	165 kN	159 kg	2"
FW0100-O	270 mm	45000 kg	240 kN	272 kg	3.5"
FW0100-OC	230 mm	45000 kg	240 kN	268 kg	3.5"
FW0100-D	270 mm	45000 kg	165 kN	272 kg	2"
FW0100-DC	230 mm	45000 kg	165 kN	268 kg	2"

Holland reserves the right, without prior notice, to change specifications and dimensions.

FW0100 FIFTH WHEEL - SPARE PARTS

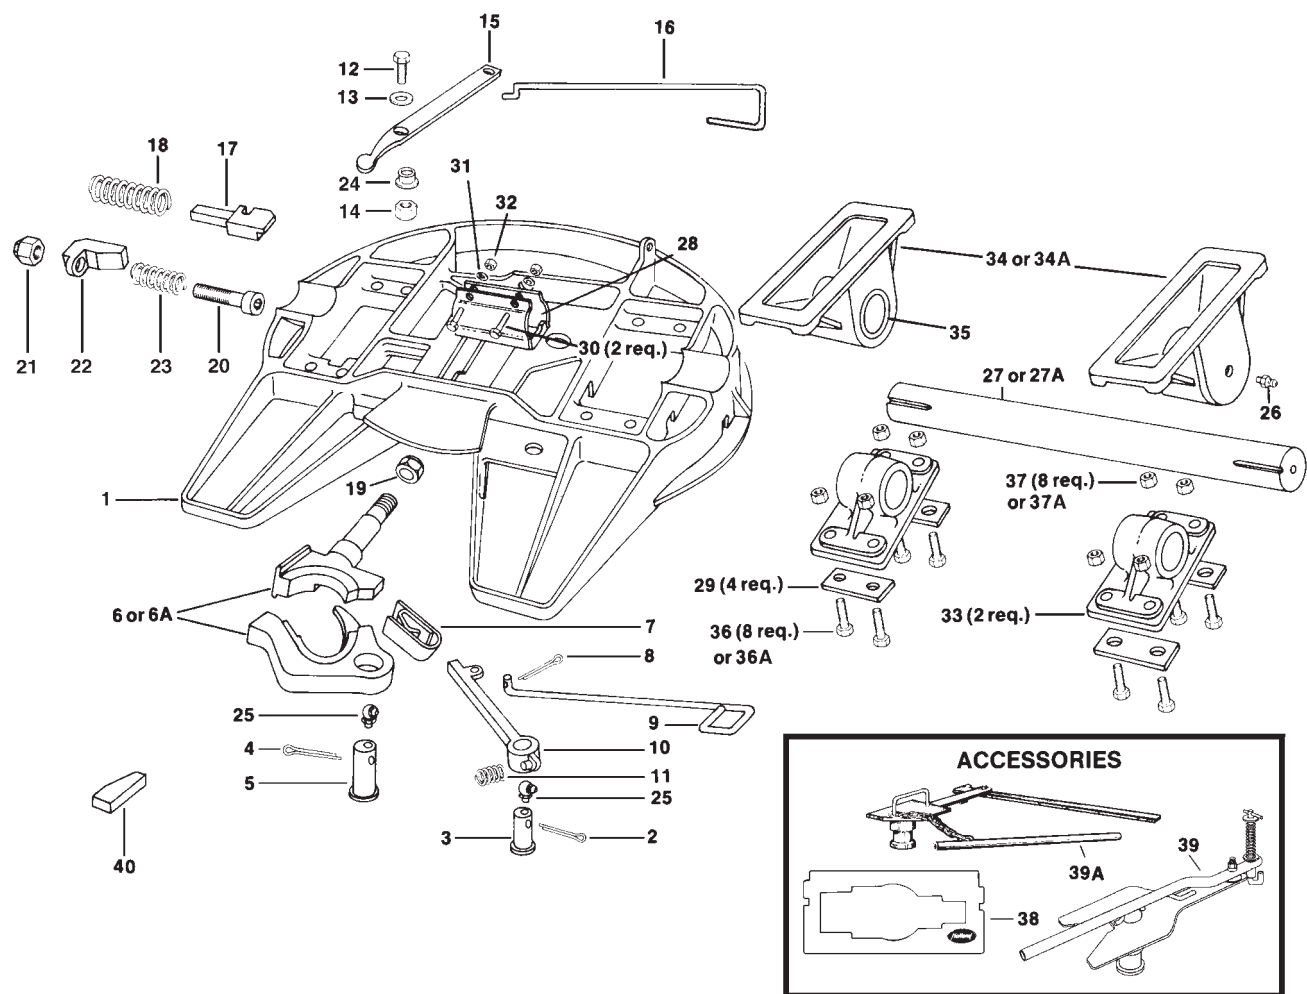

ITEM	PART NO.	QTY.	DESCRIPTION	ITEM	PART NO.	QTY.	DESCRIPTION
* 1	XA-101-D	1	Fifth Wheel top plate - 2" kingpin	22	XD-3123-1	1	Adjustment wedge
* 1A	XA-101-O	1	Fifth Wheel top plate - 3.5" kingpin	23	XB-403	1	Compression spring
2	XB-5	1	Cotter pin 1/4" x 2"	24	XB-02949	1	Bushing
3	XA-1016-C	1	Lock pin	25	XB-767-C	2	Lube fitting (45°)
4	XB-T-60	1	Cotter pin 1/4" x 2.5"	*26	XB-H-38	2	Lube fitting
5	XA-FW-108-D-1	1	Lock pin	*27	XA-FW-106	1	Trunnion shaft
6	XA-FW-104-D	1	Lock set for 2" kingpin	*28	XA-FW-113-D	2	Trunnion shaft clamp
6A	XA-FW-104-03	1	Lock set for 3.5" kingpin	*29	XB-03371	4	Shims
7	XA-FW-128	1	Spring	*30	XB-772	2	Hex bolt 3/4" - 16 x 3"
8	XB-16	1	Cotter pin 1/8" x 1"	*31	XB-PW-1316-112	2	Washer
9	XA-FW-138	1	Secondary lock release handle	*32	XB-769	2	Nut 3/4" - 16
10	XA-FW-137-2	1	Secondary lock arm	*33	XA-FW-103	2	Trunnion shaft bracket
11	XB-1028-2	1	Spring	*34	XA-FW-102	2	Mounting bracket - 10.5" height
12	XB-2083	1	Hex head cap screw 1/2" - 20 x 1.75	*34A	XA-FW-102-C	2	Mounting bracket - 9" height
13	XB-T-49	1	Plain washer	*35	XA-FW-107	2	Bushing
14	XB-T-69-A	1	Hex lock nut 1/2" - 20	*36	XB-08914	8	Bolt 7/8"-14x4"
15	XA-1005-FD-3	1	Release lever	*37	XB-T-307	8	Lock nut 7/8"-14
16	XA-1117-13	1	Release handle	*36A	XB-FW-109	8	Hex head cap bolt 1"- 8 x 4"
17	XA-1104	1	Plunger	*37A	XB-C-41	8	Lock nut 1"- 8
18	XB-1007	1	Compression spring (red)	*38	TF-0110	1	Kingpin gage
19	XB-04473	1	Jam nut 1" - 14	*39	TF-TLN-5001	1	2" kingpin lock tester
20	XB-2001	1	Socket head cap screw	*39A	TF-TLN-1500	1	3.5" kingpin lock tester
21	XB-HNH-58-C	1	Lock Nut 5/8" - 11	40	XA-05768	1	Adjusting block
RK-65024 Lock repair kit (2")				RK-65012 Full overhaul kit (2")			
RK-65024-1 Lock repair kit (3.5")				RK-65013 Full overhaul kit (3.5")			

* Not included in Rebuild Kits

Copyright © June 2004 • The Holland Group Inc.

Holland
The Holland Group, Inc.
Holland, MI 49423
United States
Phone: (616) 396-6501
Fax: (616) 396-1511

EN ISO
9001:2000

Certified
Company

Holland Europe GmbH
Altenkamp 9
D-33758
Schloss Holte-Stukenbrock
Germany
Phone: +49 (0) 5207-89560
Fax: +49 (0) 5207-895656

Holland Eurohitch Ltd.
Hoo Farm Industrial Estate
Worcester Road
Kidderminster
Worcestershire
DY11 7RA
Phone: +44 (0) 1562-732010
Fax: +44 (0) 1562-732020

Holland Hitch (Aust.) Pty. Ltd.
Melton, Victoria, Australia
Phone: 61-(0)3-9743-6799
Fax: 61-(0)3-9747-9617

Holland Transtrade
(Thailand) Company, Ltd.
Bangkok, Thailand
Phone: 66 (0)2-513-8758
Fax: 66 (0)2-513-8757

Nippon Holland, Ltd.
Tokyo, Japan
Phone: 81-(0)3-3461-9130
Fax: 81-(0)3-3463-1407

Holland Transtrade
Far East SDN BHD
Shah Alam, Malaysia
Phone: 60 (0)3 734-2888
Fax: 60 (0)3 736-5588