




FW2E70

SPECIFICATIONS

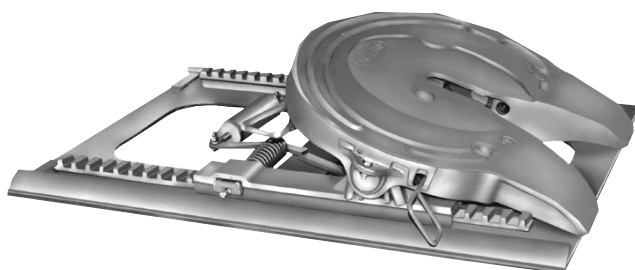

Sliding Heavy Duty Fifth Wheel FW2E70

34000 kg Vertical Load

For Gross Combination Weight and D-Value see table below

Stable and highly durable construction for use with specially fabricated mountings to suit individual applications

FEATURES OF THE FW2E70



- Sliding Fifth Wheel with Heavy Duty Top Plate FW0E70
- Available with Locks for 3.5" and 2" Kingpins.
- Standard travel length from 272 up to 1671 mm, Fifth Wheel height 229 mm and Slide plate width of 940 mm
- Fifth wheel adjustable in 38mm increments
- Locking plungers adjustable for wear
- Locking with air release



Mounting must be carried out in accordance with Holland instructions



The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland

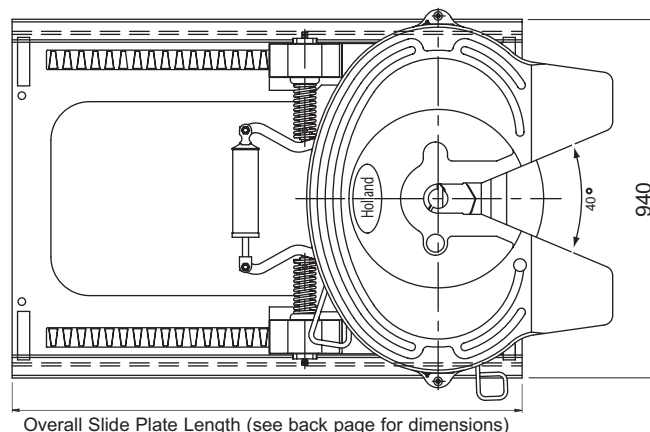

Note : Gross Combination Weight and D-Value limited according to maximum operating speed - see table below for details

Locks	GCW	Vertical Load	D-Value**	Max. Speed
2"	80000 kg	34000 kg	165 kN	85 km/h
3.5"	80000 kg	34000 kg	200 kN	85 km/h
3.5"	80000 kg	34000 kg	240 kN	70 km/h
3.5"	100000 kg	34000 kg	240 kN	60 km/h
3.5"	110000 kg	34000 kg	240 kN	45 km/h

Holland reserves the right, without prior notice, to change specifications and dimensions.

** Note : D-Value of king pin to be used must also be suitable for the tractor / trailer combination

PART NUMBER SYSTEM

Part number guide for complete sliding fifth wheel assemblies

FW 2E70 - 7102X2L02

Fifth Wheel Type	
FW0E70	2E70

Slide Plate Type	
7100 series	71

Release Method	
Air Release	0

Height	
229mm	2

Lock Type	
3.5"	03
2"	02

Release Side	
Left Hand	L


Slide Plate/Travel Length	
See separate table below	

Slide Plate Width	
940mm	X

Length Code	Slide Plate Length	Travel Length
1	988mm	272mm
2	1143mm	427mm
3	1336mm	622mm
4	1765mm	1049mm
5	2083mm	1360mm
6	2388mm	1671mm

AIR CONTROL KIT

All FW2E70 sliding fifth wheels are air operated, therefore order air control kit **RK2500-10-A** when ordering these sliders.

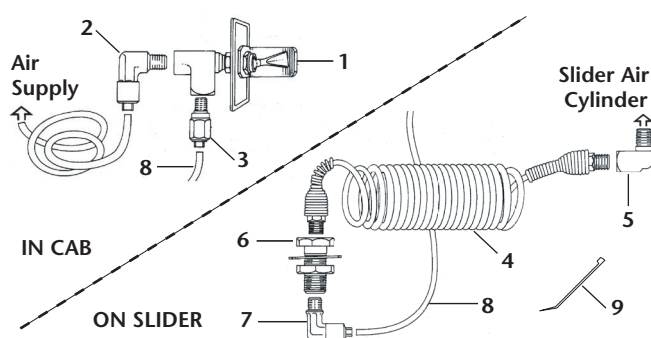

Item	Part No.	Qty	Description
1	XA-02048	1	Switch Assembly
2	XB-04248	1	Elbow Fitting
3	XB-02447	1	Straight Fitting
4	XB-1960	1	Air Coil
5	XB-1996	1	Elbow Fitting
6	XB-01959	1	Bulkhead Fitting
7	XB-04249	1	Elbow Fitting
8	XB-04250	1	Tubing (9 metre coil)
9	XB-01961	5	Cable Tie

Copyright © June 2004 • The Holland Group Inc.



The Holland Group, Inc.
Holland, MI 49423
United States
Phone: (616) 396-6501
Fax: (616) 396-1511

EN ISO
9001:2000



DNV
Certified
Company

Holland Europe GmbH
Altenkamp 9
D-33758
Schloss Holte-Stukenbrock
Germany
Phone: +49 (0) 5207-89560
Fax: +49 (0) 5207-895656

Holland Eurohitch Ltd.
Hoo Farm Industrial Estate
Worcester Road
Kidderminster
Worcestershire
DY11 7RA
Phone: +44 (0) 1562-732010
Fax: +44 (0) 1562-732020

Holland Hitch (Aust.) Pty. Ltd.
Melton, Victoria, Australia
Phone: 61-(0)3-9743-6799
Fax: 61-(0)3-9747-9617

Holland Transtrade
(Thailand) Company, Ltd.
Bangkok, Thailand
Phone: 66 (0)2-513-8758
Fax: 66 (0)2-513-8757

Nippon Holland, Ltd.
Tokyo, Japan
Phone: 81-(0)3-3461-9130
Fax: 81-(0)3-3463-1407

Holland Transtrade
Far East SDN BHD
Shah Alam, Malaysia
Phone: 60 (0)3 734-2888
Fax: 60 (0)3 736-5588