



FW3410

FW3410 SERIES SPECIFICATIONS



Fifth Wheel

65000 kg Gross Combination Weight
20000 kg Vertical Load

Type Approval e1*94/20*0812
D-Value 150 kN

FEATURES

- Low maintenance fifth wheel, easily replaceable wear pads on the top face eliminate the need for greasing of the top surface and wear and tear of the casting - environmentally friendly
- High strength cast steel construction - permitted operating temperature to - 40° C
- Forged alloy steel locks with infinite adjustment
- Operating handle fitted with automatic secondary locking device, eliminating the need for a clip and chain
Also available with optional long handle
- Suitable for all types of rear axle steering




Mounting must be carried out in accordance with Holland instructions



The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland

ISO BRACKET MOUNTING

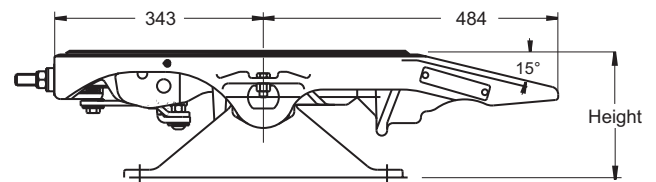


Part Number*	Height	Weight
FW3410-150	150mm	135 kg
FW3410-180	180mm	139 kg
FW3410-200	200mm	142 kg

* add suffix -XL for version with long handle

WEIGHTSAVER MOUNTING


Combined mounting brackets and mounting plate resulting in weight reduction and easier installation

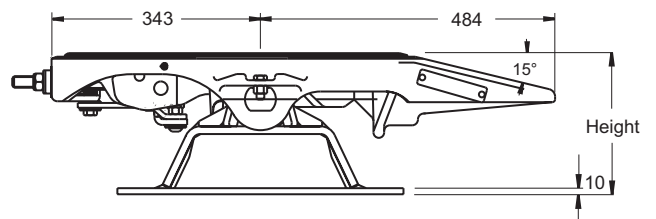

Part Number*	Height	Weight
FW3410-140	140mm	158 kg
FW3410-160	160mm	160 kg
FW3410-190	190mm	163 kg
FW3410-230	230mm	166 kg










* add suffix -XL for version with long handle

Weightsaver mounting shown

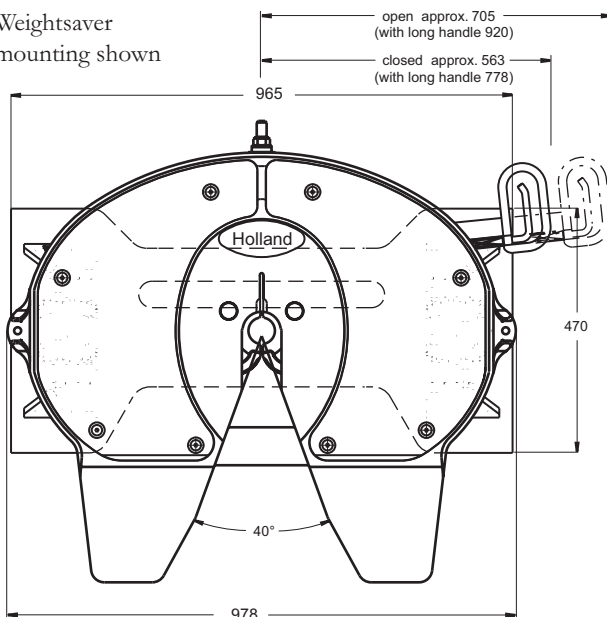

Holland reserves the right, without prior notice, to change specifications and dimensions

FW3410 FIFTH WHEEL - SPARE PARTS

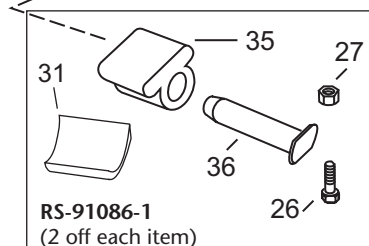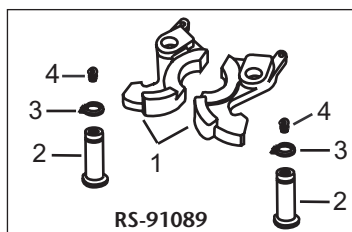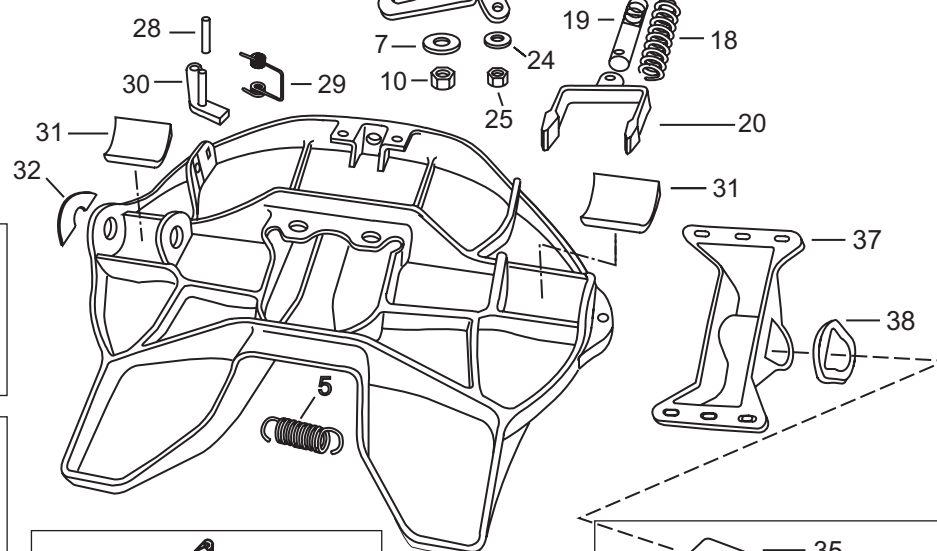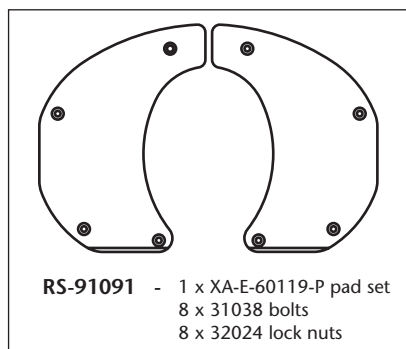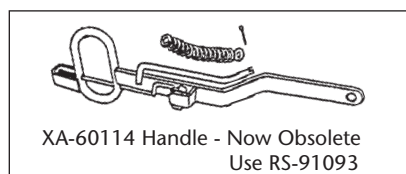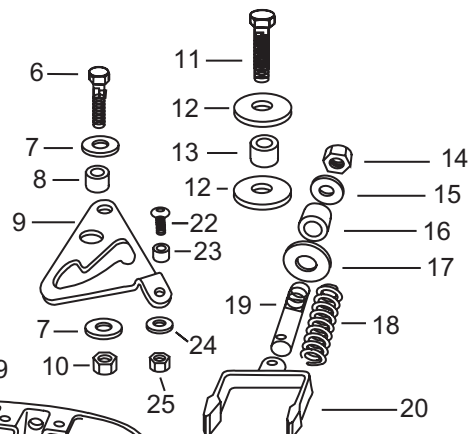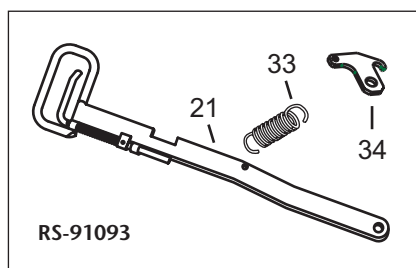

Item	Part No.	Qty	Description	Item	Part No.	Qty	Description
1	* XA-07296-KTL	1	Lock Jaw Set	22	* 31040	1	Socket Head Screw
2	* XA-07292-82	2	Lock Pin	23	* XA-03082	1	Bushing
3	* 38027	2	Retaining Ring	24	* 33031	1	Washer
4	* 38028	2	Grease Fitting	25	* 32001	1	Lock Nut
5	* XB-07628-KTL	1	Extension Spring	26	31041	2	Bolt
6	* 31039	1	Hex Head Cap Screw	27	32001	2	Locknut
7	* XB-76004	2	Washer	28	* XB-21-S-500-2750	1	Roll Pin
8	* XA-1029	1	Roller	29	* XB-2149-KTL	1	Torsion Spring
9	* XA-07150-R-KTL	1	Camplate	30	* XA-3542-R-KTL	1	Secondary Lock
10	* 32001	1	Locknut	31	XB-10210	2	Pocket Insert
11	* XB-CX-58-F-134	1	Hex Head Cap Screw	32	XB-07610	1	Tag
12	* XB-07431-KTL	2	Washer	33	* XB-05679-2	1	Extension Spring
13	* XA-1507	1	Roller	34	* XA-09645-KTL	1	Spring Mount
14	* XB-HNH-34-F	1	Locknut	35	XB-0011-3	2	Rubber Cushion
15	* 33034	1	Washer	36	XE-06356-KTL	2	Bracket Pin
16	* XB-1127	1	Rubber Washer	37	XD-04942-KTL	2	ISO Bracket - 150mm
17	* XB-02312	1	Lock Adjustment Tag		XD-04943-KTL	2	ISO Bracket - 180mm
18	* XB-1505-KTL	1	Compression Spring		XD-04944-KTL	2	ISO Bracket - 200mm
19	* XA-1706	1	Yoke Shaft	38	XB-60144	2	Rubber Washer (With ISO bracket only)
20	* XA-07295-KTL	1	Yoke	39	XB-H-38	1	Grease Fitting
21	* XA-09437 XA-09752	1 1	Handle Long Handle (not shown)				
* RK-3510-R					RS-91093		Handle Kit Complete (Replaces XA-60114 Handle)
RS-91089					RS-91098		Handle Kit Complete (With optional long handle)
RS-91086-1							
RS-91091							
RS-91110							

Copyright © June 2004 • The Holland Group Inc.



The Holland Group, Inc.
Holland, MI 49423
United States
Phone: (616) 396-6501
Fax: (616) 396-1511



Holland Europe GmbH
Altenkamp 9
D-33758
Schloss Holte-Stukenbrock
Germany
Phone: +49 (0) 5207-89560
Fax: +49 (0) 5207-895656

Holland Eurohitch Ltd.
Hoo Farm Industrial Estate
Worcester Road
Kidderminster
Worcestershire
DY11 7RA
Phone: +44 (0) 1562-732010
Fax: +44 (0) 1562-732020

Holland Hitch (Aust.) Pty. Ltd.
Melton, Victoria, Australia
Phone: 61-(0)3-9743-6799
Fax: 61-(0)3-9747-9617

Holland Transtrade
(Thailand) Company, Ltd.
Bangkok, Thailand
Phone: 66 (0)2-513-8758
Fax: 66 (0)2-513-8757

Nippon Holland, Ltd.
Tokyo, Japan
Phone: 81-(0)3-3461-9130
Fax: 81-(0)3-3463-1407

Holland Transtrade
Far East SDN BHD
Shah Alam, Malaysia
Phone: 60 (0)3 734-2888
Fax: 60 (0)3 736-5588