




FW17EK

FW17EK SPECIFICATIONS

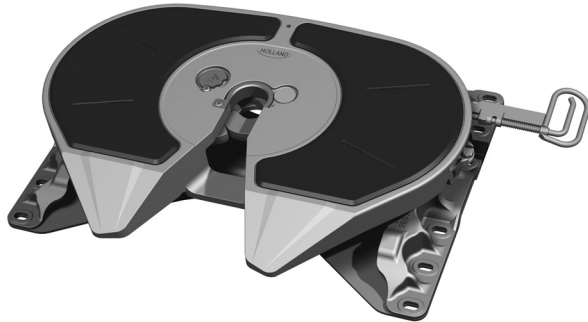

NoLube Fifth Wheel

65000 kg Gross Combination Weight
20000 kg Vertical Load

Type Approval e11*94/20*0052
D-Value 150 kN

FEATURES


- All lock system components are protected with a low friction coating providing long wear life and superior corrosion protection
- Thin walled steel casting and heat treating process gives exceptional performance and outstanding fatigue characteristics along with a 23% reduction in weight
- Patented surface alloy on the king pin contact surfaces of the lock jaws provides lubrication-free operation, high wear resistance and eliminates the need to grease the locks
- Operating handle fitted with automatic secondary locking device, eliminating the need for a clip and chain
- Suitable for all types of rear axle steering



WARNING

Mounting must be carried out in accordance with Holland instructions

Lightweight bracket mounting shown

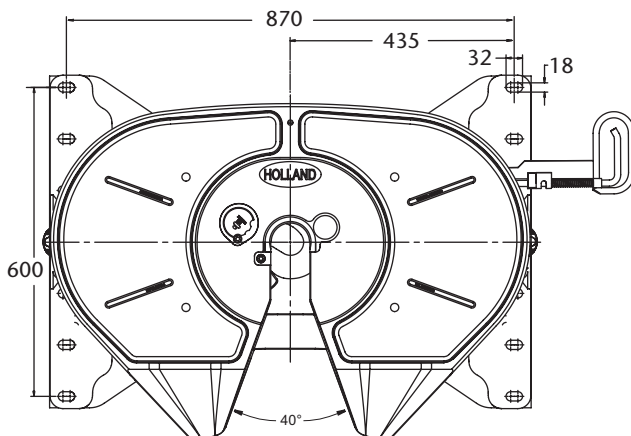


WARNING

The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland

LIGHTWEIGHT BRACKET MOUNT

Lightweight bracket system giving the lightest fifth wheel installation weight available

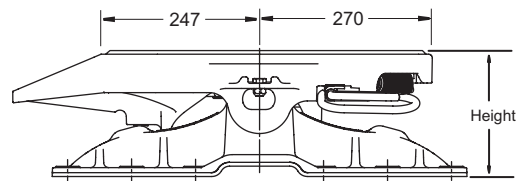


Part Number*	Height	Weight
FW17EK-DM-200	199mm	142 kg

WEIGHTSAVER MOUNTING (Not Shown)

FW17EK-W(*)-150	151mm	134 kg
FW17EK-W(*)-175	175mm	136 kg
FW17EK-W(*)-200	200mm	139 kg
FW17EK-W(*)-240	238mm	143 kg

(*) - Width of weightsaver plate : 1 = 965 mm, 2 = 1050 mm


ISO BRACKET MOUNTING

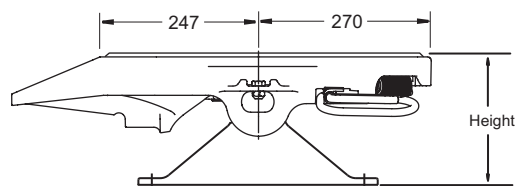


Part Number*	Height	Weight
FW17EK-IS-160	162mm	115 kg
FW17EK-IS-190	192mm	117 kg
FW17EK-IS-215	214mm	119 kg

Holland reserves the right, without prior notice, to change specifications and dimensions

FW17EK NoLube FIFTH WHEEL - SPARE PARTS

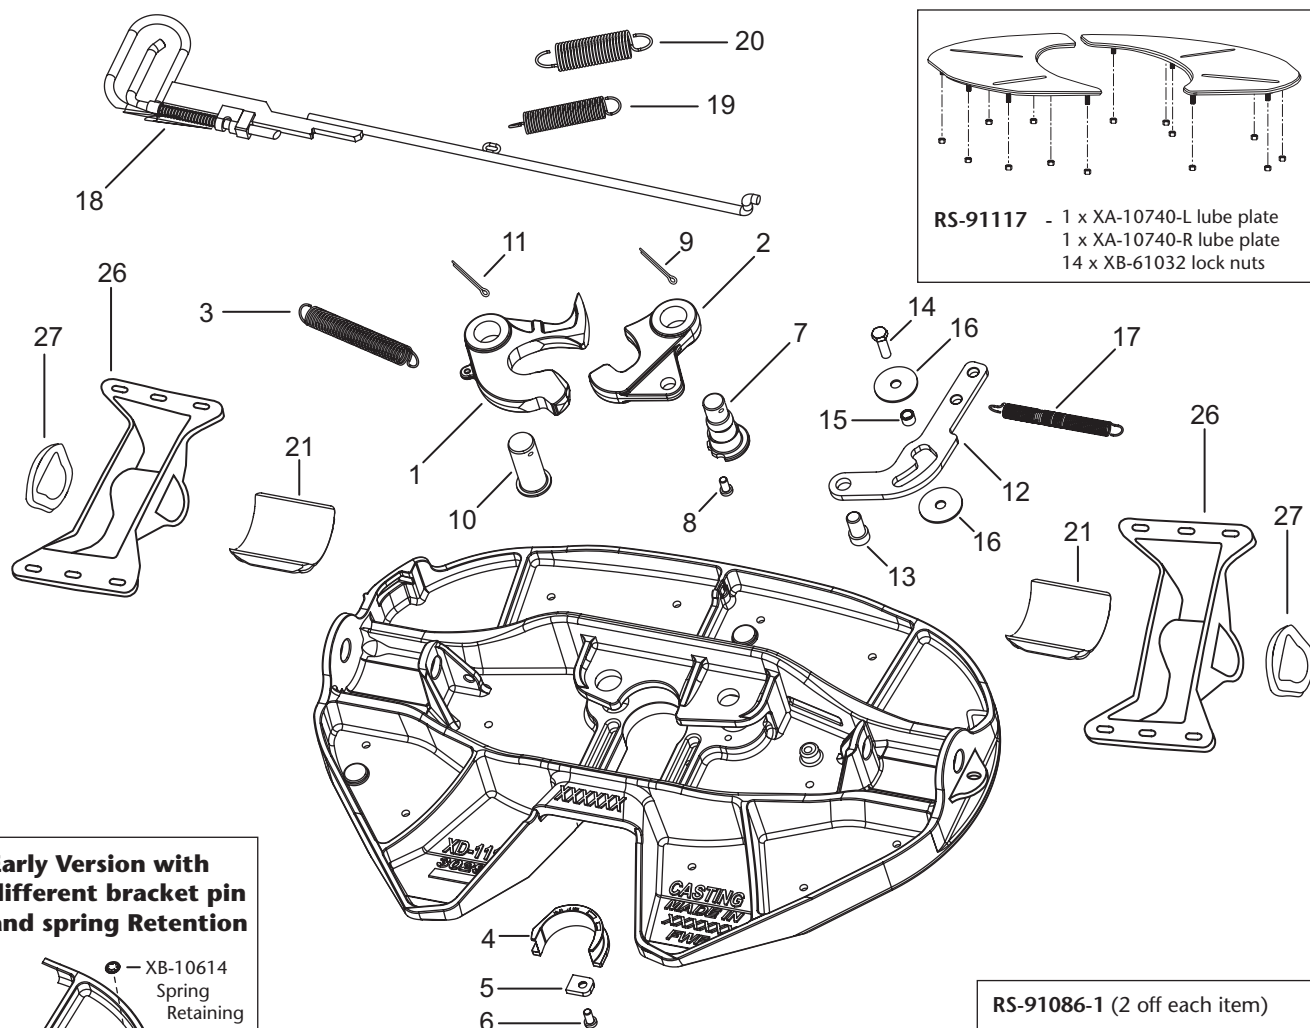


Early Version with different bracket pin and spring Retention



RS-91116 Cushion Kit (early version)

2 x XB-10210 Pocket Insert
 2 x XB-0011-3 Rubber Cushion
 2 x XA-06356-E-KTL Bracket Pin
 2 x XA-10679-KTL Retainer Plate
 2 x XB-LHSCS-M12-20-Z Bolt

RS-91086-1 (2 off each item)



Item	Part No.	Qty	Description	Item	Part No.	Qty	Description
1	* ^ XA-10486-E-KTL	1	Lock	16	* XB-10294	2	Washer
2	* ^ XA-10487-KTL	1	Hook	17	* XB-10563-KTL	1	Spring
3	* ^ XB-05843-1-KTL	1	ExtensionSpring	18	* XA-10681	1	Release Handle
4	* ^ XD-10680-1-KTL	1	Front Lock Insert	19	* XB-10489-KTL	1	Spring - Inner
5	* ^ XA-10706-1-KTL	1	Insert Keeper	20	* XB-10490-KTL	1	Spring - Outer
6	* ^ XB-02724-M	1	Keeper Bolt	21	* XB-10210	2	Pocket Insert
7	* ^ XA-10364-3-KTL	1	Adjuster Pin	22	* XB-0011-3	2	Rubber Cushion
8	* ^ XB-02724-M	1	Location Bolt	23	* XA-06356-KTL	2	Bracket Pin
9	* ^ XB-5	1	Cotter Pin	24	31041	2	Bolt
10	* ^ XA-06344-KTL	1	Lock Pin	25	32001	2	Nut
11	* ^ XB-5	1	Cotter Pin	26	XD-04942-KTL	2	ISO Bracket - 160mm
12	* XA-10483-E1	1	Cam, Release		XD-04943-KTL	2	ISO Bracket - 190mm
13	* XA-10485-1-KTL	1	Pin, Hook		XD-04944-KTL	2	ISO Bracket - 215mm
14	* XB-HCS-M12-40-Z	1	Bolt	27	* XB-60144	2	Rubber Washer
15	* XA-10810	1	Bush				
* RS-91112 Full Overhaul Kit				RS-91086-1 Cushion Kit (July 2006 on)			
^ RS-91111 Lock Repair Kit				RS-91116 Cushion Kit (Early Version)			
				RS-91117 Replacement Pad Set			

Copyright © July 2006 • The Holland Group Inc.



The Holland Group, Inc.
 Holland, MI 49423
 United States
 Phone: (616) 396-6501
 Fax: (616) 396-1511

Holland Europe GmbH

Altenkamp 9
 D-33758
 Schloss Holte-Stukenbrock
 Germany

Phone: +49 (0) 5207-89560
 Fax: +49 (0) 5207-895656

EN ISO
 9001:2000



Certified
 Company

Holland Eurohitch Ltd.

Hoo Farm Industrial Estate
 Worcester Road
 Kidderminster
 Worcestershire
 DY11 7RA

Phone: +44 (0) 1562-732010
 Fax: +44 (0) 1562-732020

Holland Hitch (Aust.) Pty. Ltd.

Melton, Victoria, Australia
 Phone: 61-(0)3-9743-6799
 Fax: 61-(0)3-9747-9617

Holland Transtrade
 (Thailand) Company, Ltd.
 Bangkok, Thailand

Phone: 66 (0)2-513-8758
 Fax: 66 (0)2-513-8757

Nippon Holland, Ltd.

Tokyo, Japan
 Phone: 81-(0)3-3461-9130
 Fax: 81-(0)3-3463-1407

Holland Transtrade

Far East SDN BHD
 Shah Alam, Malaysia
 Phone: 60 (0)3 734-2888
 Fax: 60 (0)3 736-5588