




FW17E

FW17E SPECIFICATIONS

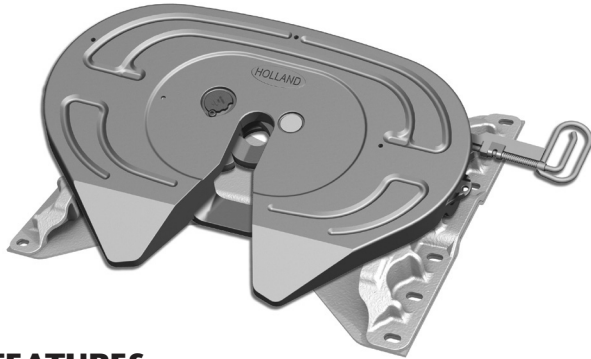

FEATURES


- Thin walled steel casting and heat treating process gives exceptional performance and outstanding fatigue characteristics along with a 23% reduction in weight
- High strength cast steel construction - permitted operating temperature to - 40°C
- Forged alloy steel locks with patented adjustment system easily adjusted from the top of the fifth wheel
- Cast in grease grooves to keep grease where it is needed
- Operating handle fitted with automatic secondary locking device, eliminating the need for a clip and chain
- Suitable for all types of rear axle steering



WARNING

Mounting must be carried out in accordance with Holland instructions

Lightweight bracket mounting shown

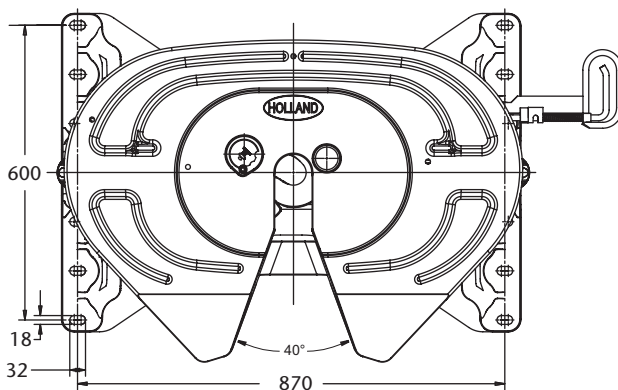

Lightweight Cast Steel Fifth Wheel

65000 kg Gross Combination Weight
20000 kg Vertical Load

Type Approval e11*94/20*0054
D-Value 150 kN




WARNING

The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland

LIGHTWEIGHT BRACKET MOUNT

Lightweight bracket system giving the lightest fifth wheel installation weight available

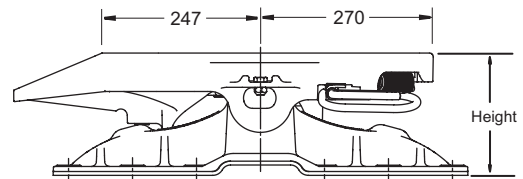


Part Number*	Height	Weight
FW17E-DM-190	191mm	138 kg

WEIGHTSAVER MOUNTING (Not Shown)

FW17E-W(*)-145	143mm	129 kg
FW17E-W(*)-165	166mm	132 kg
FW17E-W(*)-190	192mm	135 kg
FW17E-W(*)-230	230mm	138 kg

(*) - Width of weightsaver plate : 1 = 965 mm, 2 = 1050 mm

ISO BRACKET MOUNTING

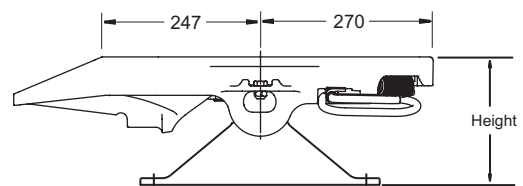


Part Number*	Height	Weight
FW17E-IS-155	154mm	108 kg
FW17E-IS-185	184mm	112 kg
FW17E-IS-205	206mm	114 kg

Holland reserves the right, without prior notice, to change specifications and dimensions

XL-FW1127-01

FW17E FIFTH WHEEL - SPARE PARTS

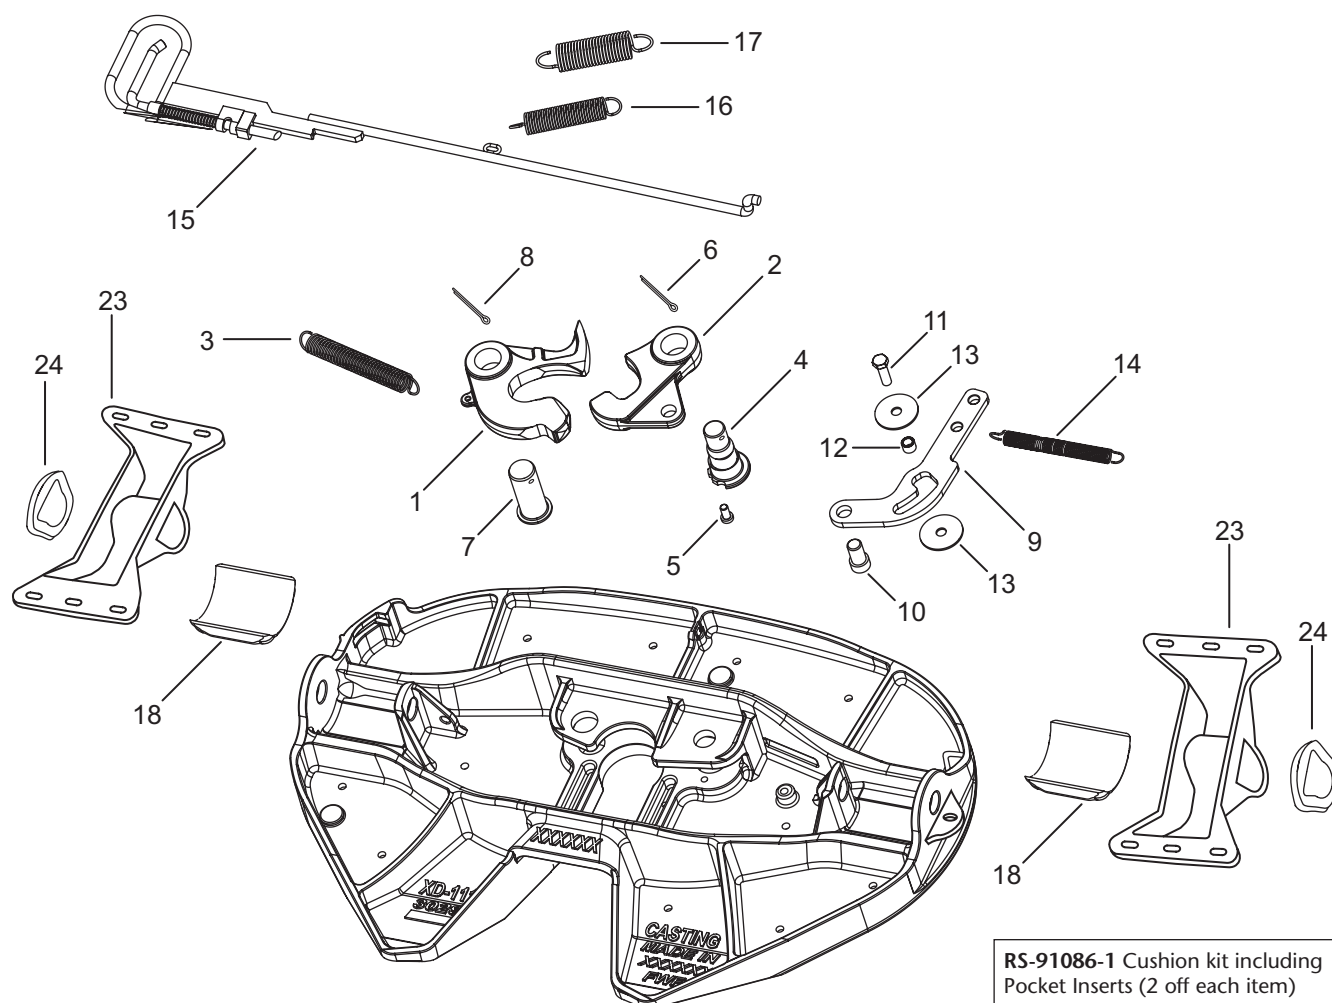

RS-91086-1 Cushion kit including
Pocket Inserts (2 off each item)

Item	Part No.	Qty	Description	Item	Part No.	Qty	Description
1 *	XA-10486-KTL	1	Lock	14 *	XB-10563-KTL	1	Spring
2 *	XA-10487-KTL	1	Hook	15 *	XA-10681	1	Release Handle
3 *	XB-05843-1-KTL	1	ExtensionSpring	16 *	XB-10489-KTL	1	Spring - Inner
4 *	XA-10364-3-KTL	1	Adjuster Pin	17 *	XB-10490-KTL	1	Spring - Outer
5 *	XB-02724-M	1	Location Bolt	18	XB-10210	2	Pocket Insert
6 *	XB-5	1	Cotter Pin	19	XB-0011-3	2	Rubber Cushion
7 *	XA-06344-KTL	1	Lock Pin	20	XA-06356-KTL	2	Bracket Pin
8 *	XB-5	1	Cotter Pin	21	31041	2	Bolt
9 *	XA-10483-E-KTL	1	Cam, Release	22	32001	2	Locknut
10 *	XA-10485-1-KTL	1	Pin, Hook	23	XD-04942-KTL	2	ISO Bracket - 155mm
11 *	XB-HCS-M12-40-Z	1	Bolt		XD-04943-KTL	2	ISO Bracket - 185mm
12 *	XA-10810	1	Bush		XD-04944-KTL	2	ISO Bracket - 205mm
13 *	XB-08559	2	Washer	24	XB-60144	2	Rubber Washer
*	RS-91120		Full Overhaul Kit		RS-91086-1		Cushion Kit
^	RS-91121		Lock Repair Kit				

Copyright © July 2006 • The Holland Group Inc.



The Holland Group, Inc.
Holland, MI 49423
United States
Phone: (616) 396-6501
Fax: (616) 396-1511

Holland Europe GmbH

Altenkamp 9
D-33758
Schloss Holte-Stukenbrock
Germany

Phone: +49 (0) 5207-89560
Fax: +49 (0) 5207-895656

EN ISO
9001:2000



Certified
Company

Holland Eurohitch Ltd.

Hoo Farm Industrial Estate
Worcester Road
Kidderminster
Worcestershire
DY11 7RA

Phone: +44 (0) 1562-732010
Fax: +44 (0) 1562-732020

Holland Hitch (Aust.) Pty. Ltd.

Melton, Victoria, Australia
Phone: 61-(0)3-9743-6799
Fax: 61-(0)3-9747-9617

Holland Transtrade

(Thailand) Company, Ltd.
Bangkok, Thailand
Phone: 66 (0)2-513-8758
Fax: 66 (0)2-513-8757

Nippon Holland, Ltd.

Tokyo, Japan
Phone: 81-(0)3-3461-9130
Fax: 81-(0)3-3463-1407

Holland Transtrade

Far East SDN BHD
Shah Alam, Malaysia
Phone: 60 (0)3 734-2888
Fax: 60 (0)3 736-5588