




WEIGHTSAVER®

WEIGHTSAVER®

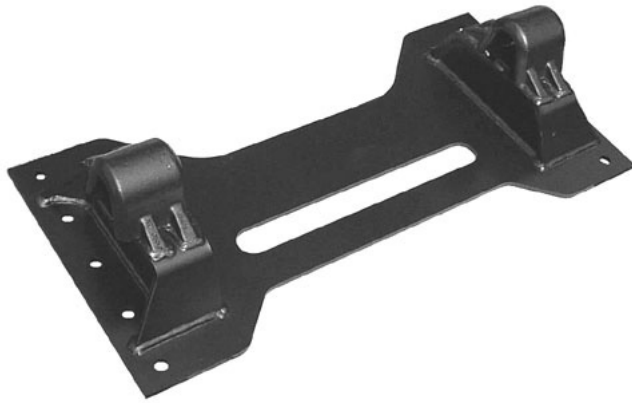

Weightsaver®

20000 kg maximum Vertical Load
150 kN D-Value

EC approved 94/20/EG



WARNING

The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland


FEATURES OF THE WEIGHTSAVER®

- The Weightsaver® is suitable for all Holland Eurohitch standard 2" Fifth Wheels and saves weight and installation time on fifth wheel mounting
- The combined mounting plate and brackets result in a **reduction of weight**
- **Time-saving** through direct mounting on chassis.
- The Weightsaver® offers safety and highest standards
- Mounting heights including Fifth Wheel are 140 mm, 160 mm, 190 mm, 230 mm
- Production in accordance with EC 94/20 standard
- Two standard hole patterns, Special hole patterns on request
- The Weightsaver® is available in two alternative widths, 965 mm and 1050 mm



WARNING

Mounting must be carried out in accordance with Holland instructions.

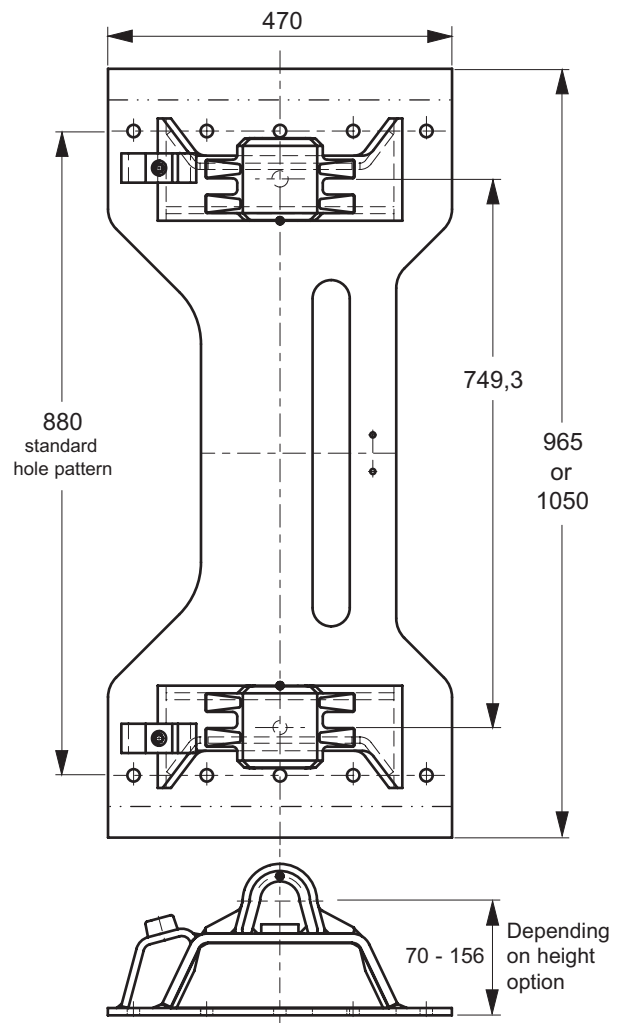


Holland reserve the right, without prior notice, to change specifications and dimensions.

PART NUMBER GUIDE


Height 140 mm (incl. Fifth Wheel)

Part No.	Width	Description
XA-E-60080	965 mm	Standard Weightsaver® undrilled
XA-E-60080-1	1050 mm	Weightsaver® undrilled
XA-E-60080-**	965 mm	Standard Weightsaver® with hole pattern
XA-E-60080-1-**	1050 mm	Weightsaver® with hole pattern




Height 160 mm (incl. Fifth Wheel)

Part No.	Width	Description
XA-E-08523-1	965 mm	Standard Weightsaver® undrilled
XA-E-08523-2	1050 mm	Weightsaver® undrilled
XA-E-08523-1-**	965 mm	Standard Weightsaver® with hole pattern
XA-E-08523-2-**	1050 mm	Weightsaver® with hole pattern




Height 190 mm (incl. Fifth Wheel)

Part No.	Width	Description
XA-E-08523-3	965 mm	Standard Weightsaver® undrilled
XA-E-08523-4	1050 mm	Weightsaver® undrilled
XA-E-08523-3-**	965 mm	Standard Weightsaver® with hole pattern
XA-E-08523-4-**	1050 mm	Weightsaver® with hole pattern




Height 230 mm (incl. Fifth Wheel)

Part No.	Width	Description
XA-E-08523-5	965 mm	Standard Weightsaver® undrilled
XA-E-08523-6	1050 mm	Weightsaver® undrilled
XA-E-08523-5-**	965 mm	Standard Weightsaver® with hole pattern
XA-E-08523-6-**	1050 mm	Weightsaver® with hole pattern



Hole pattern

** Suffix	Dimensions		
	A	B	C
D (Standard)	880	100	ø17
S (Standard)	880	100	ø19
F	880	100	ø21
G	880	101.6	ø18
M	855	100	ø21
R	900	101.5	ø17

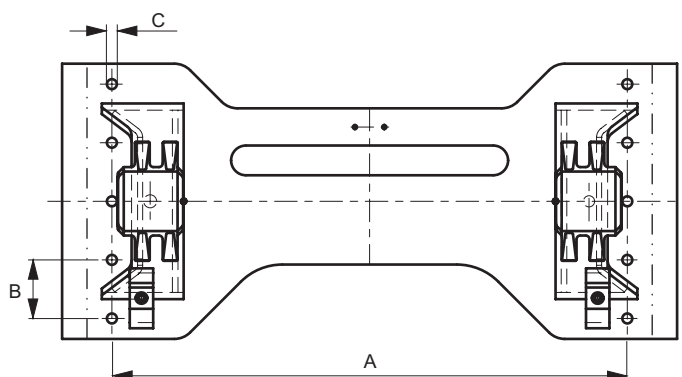

Alternative hole patterns on request

Copyright © June 2004 • The Holland Group Inc.



The Holland Group, Inc.
Holland, MI 49423
United States
Phone: (616) 396-6501
Fax: (616) 396-1511



Holland Europe GmbH
Altenkamp 9
D-33758
Schloss Holte-Stukenbrock
Germany
Phone: +49 (0) 5207-89560
Fax: +49 (0) 5207-895656

Holland Eurohitch Ltd.
Hoo Farm Industrial Estate
Worcester Road
Kidderminster
Worcestershire
DY11 7RA
Phone: +44 (0) 1562-732010
Fax: +44 (0) 1562-732020

Holland Hitch (Aust.) Pty. Ltd.
Melton, Victoria, Australia
Phone: 61-(0)3-9743-6799
Fax: 61-(0)3-9747-9617

Holland Transtrade
(Thailand) Company, Ltd.
Bangkok, Thailand
Phone: 66 (0)2-513-8758
Fax: 66 (0)2-513-8757

Nippon Holland, Ltd.
Tokyo, Japan
Phone: 81-(0)3-3461-9130
Fax: 81-(0)3-3463-1407

Holland Transtrade
Far East SDN BHD
Shah Alam, Malaysia
Phone: 60 (0)3 734-2888
Fax: 60 (0)3 736-5588