




SLIDERS

9000 SERIES SPECIFICATIONS

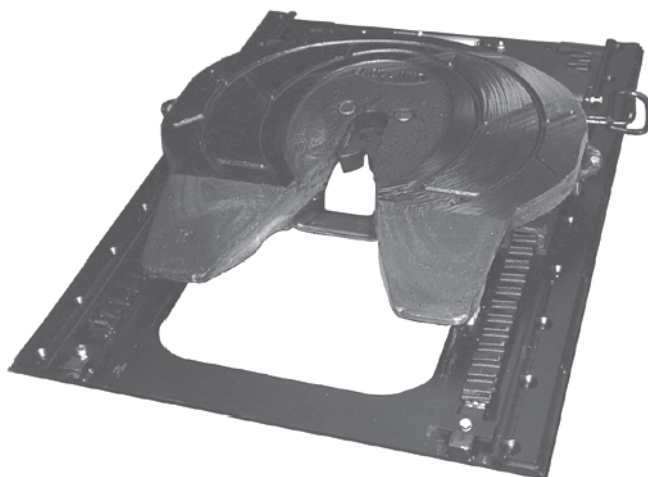

Sliding Fifth Wheel Sub-Assembly

65000 kg Gross Combination Weight

18000 kg Vertical Load

European Type Approval to 94/20/EC

e1*94/20*1217 - 170mm and 196mm high

- D-value 140 kN

e1*94/20*1218 - 221mm high

- D-Value 119 kN

FEATURES

- Available for all Holland standard fifth wheel top plates FW3510, FW3410, FW8010, and FW3010
- Standard travel lengths of 427mm and 622mm, other travel lengths up to 1555mm available on request



WARNING

Mounting must be carried out in accordance with Holland instructions




WARNING


The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland

- Fifth wheel heights of 170mm, 196mm and 221mm with manual or air release
- Fifth wheel position adjustable in 38mm increments
- Locking plungers adjustable for wear


MANUAL RELEASE MODEL

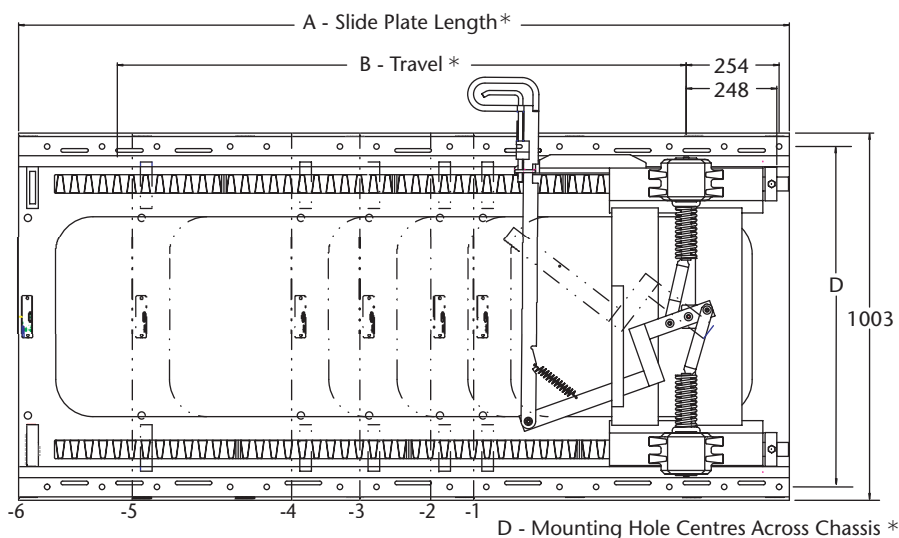

196mm and 221mm high assembly

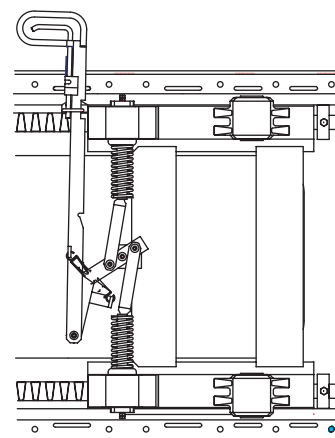


170mm high assembly




* See back page for Dimensions

Holland reserves the right, without prior notice, to change specifications and dimensions


AIR RELEASE MODEL

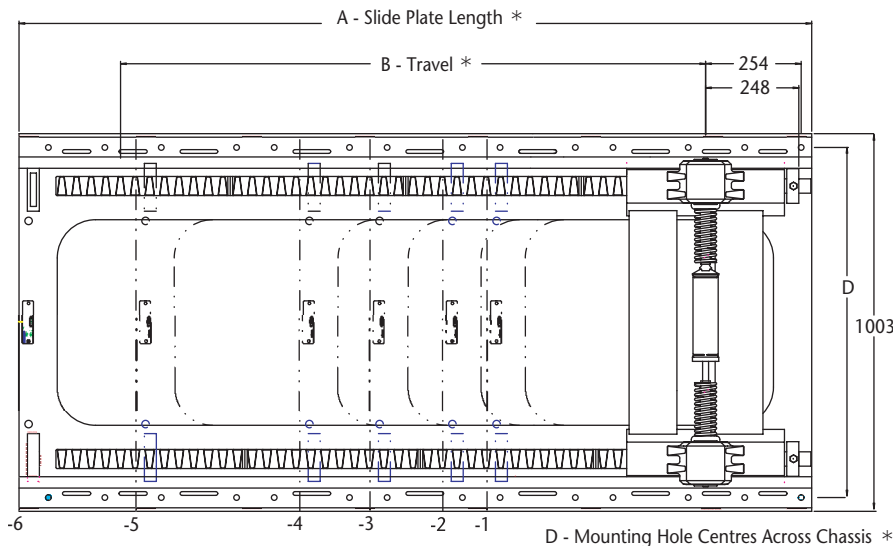


196mm and 221mm high assembly

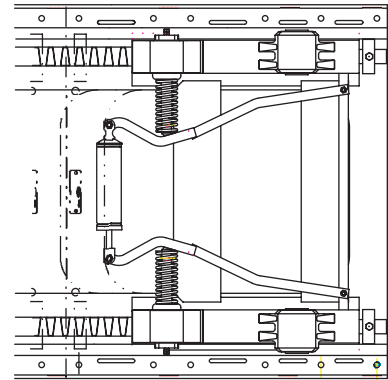

170mm high assembly



C - Fifth Wheel Height *



* See below for Dimensions

PART NUMBER GUIDE

Part number guide for complete sliding fifth wheel assemblies

FW 3510 - 9001 - 1 - D

Fifth Wheel Type

FW3510
FW3410
FW8010
FW3010*

* Not available 170mm high

Slide Plate Type

9000 series 90

Release Method

Air Release **	0
Manual Release	1

** For air operated sliding fifth wheels also order air control kit part no. RK2500-10-A

Mtg. Hole Centres 'D'

880mm (min.)	D
930mm (max.)	Blank

For other hole centres and full details of drilling patterns contact Holland

Slide Plate/Travel Length

See separate table below

Mounted Height 'C'

221mm	1
196mm	2
170mm	3

Length Code	Overall Slide Plate length 'A'	Slide travel 'B' 221mm high	Slide travel 'B' 196mm high	Slide Travel 'B' 170mm high
1	860mm	311mm	311mm	115mm
2	980mm	427mm	427mm	230mm
3	1175mm	622mm	622mm	430mm
4	1360mm	816mm	816mm	620mm
5	1795mm	1243mm	1243mm	1050mm
6	2100mm	1555mm	1555mm	1360mm

Copyright © June 2004 • The Holland Group Inc.



The Holland Group, Inc.
Holland, MI 49423
United States
Phone: (616) 396-6501
Fax: (616) 396-1511



Holland Europe GmbH
Altenkamp 9
D-33758
Schloss Holte-Stukenbrock
Germany
Phone: +49 (0) 5207-89560
Fax: +49 (0) 5207-895656

Holland Eurohitch Ltd.
Hoo Farm Industrial Estate
Worcester Road
Kidderminster
Worcestershire
DY11 7RA
Phone: +44 (0) 1562-732010
Fax: +44 (0) 1562-732020

Holland Hitch (Aust.) Pty. Ltd.
Melton, Victoria, Australia
Phone: 61-(0)3-9743-6799
Fax: 61-(0)3-9747-9617

Holland Transtrade
(Thailand) Company, Ltd.
Bangkok, Thailand
Phone: 66 (0)2-513-8758
Fax: 66 (0)2-513-8757

Nippon Holland, Ltd.
Tokyo, Japan
Phone: 81-(0)3-3461-9130
Fax: 81-(0)3-3463-1407

Holland Transtrade
Far East SDN BHD
Shah Alam, Malaysia
Phone: 60 (0)3 734-2888
Fax: 60 (0)3 736-5588